

IF IN DOUBT ASK

THIS DRAWING IS CONFIDENTIAL
AND THE COPYRIGHT OF

Bussmann Division
Cooper (U.K.) Limited

BURTON-ON-THE-WOLDS, LEICESTERSHIRE LE12 5TH.

IT MUST NOT BE COPIED OR PASSED ON TO A
THIRD PARTY WITHOUT WRITTEN CONSENT.



DRG. No. E5778911

REVISIONS


A) REDRAWN ON ACAD12
29.01.94 - RJA.

ACAD 12

DRN.	NPMN	CHKD.
DATE	25.02.87	

	THIRD ANGLE
	1:1 SCALE

COOPER
Bussmann

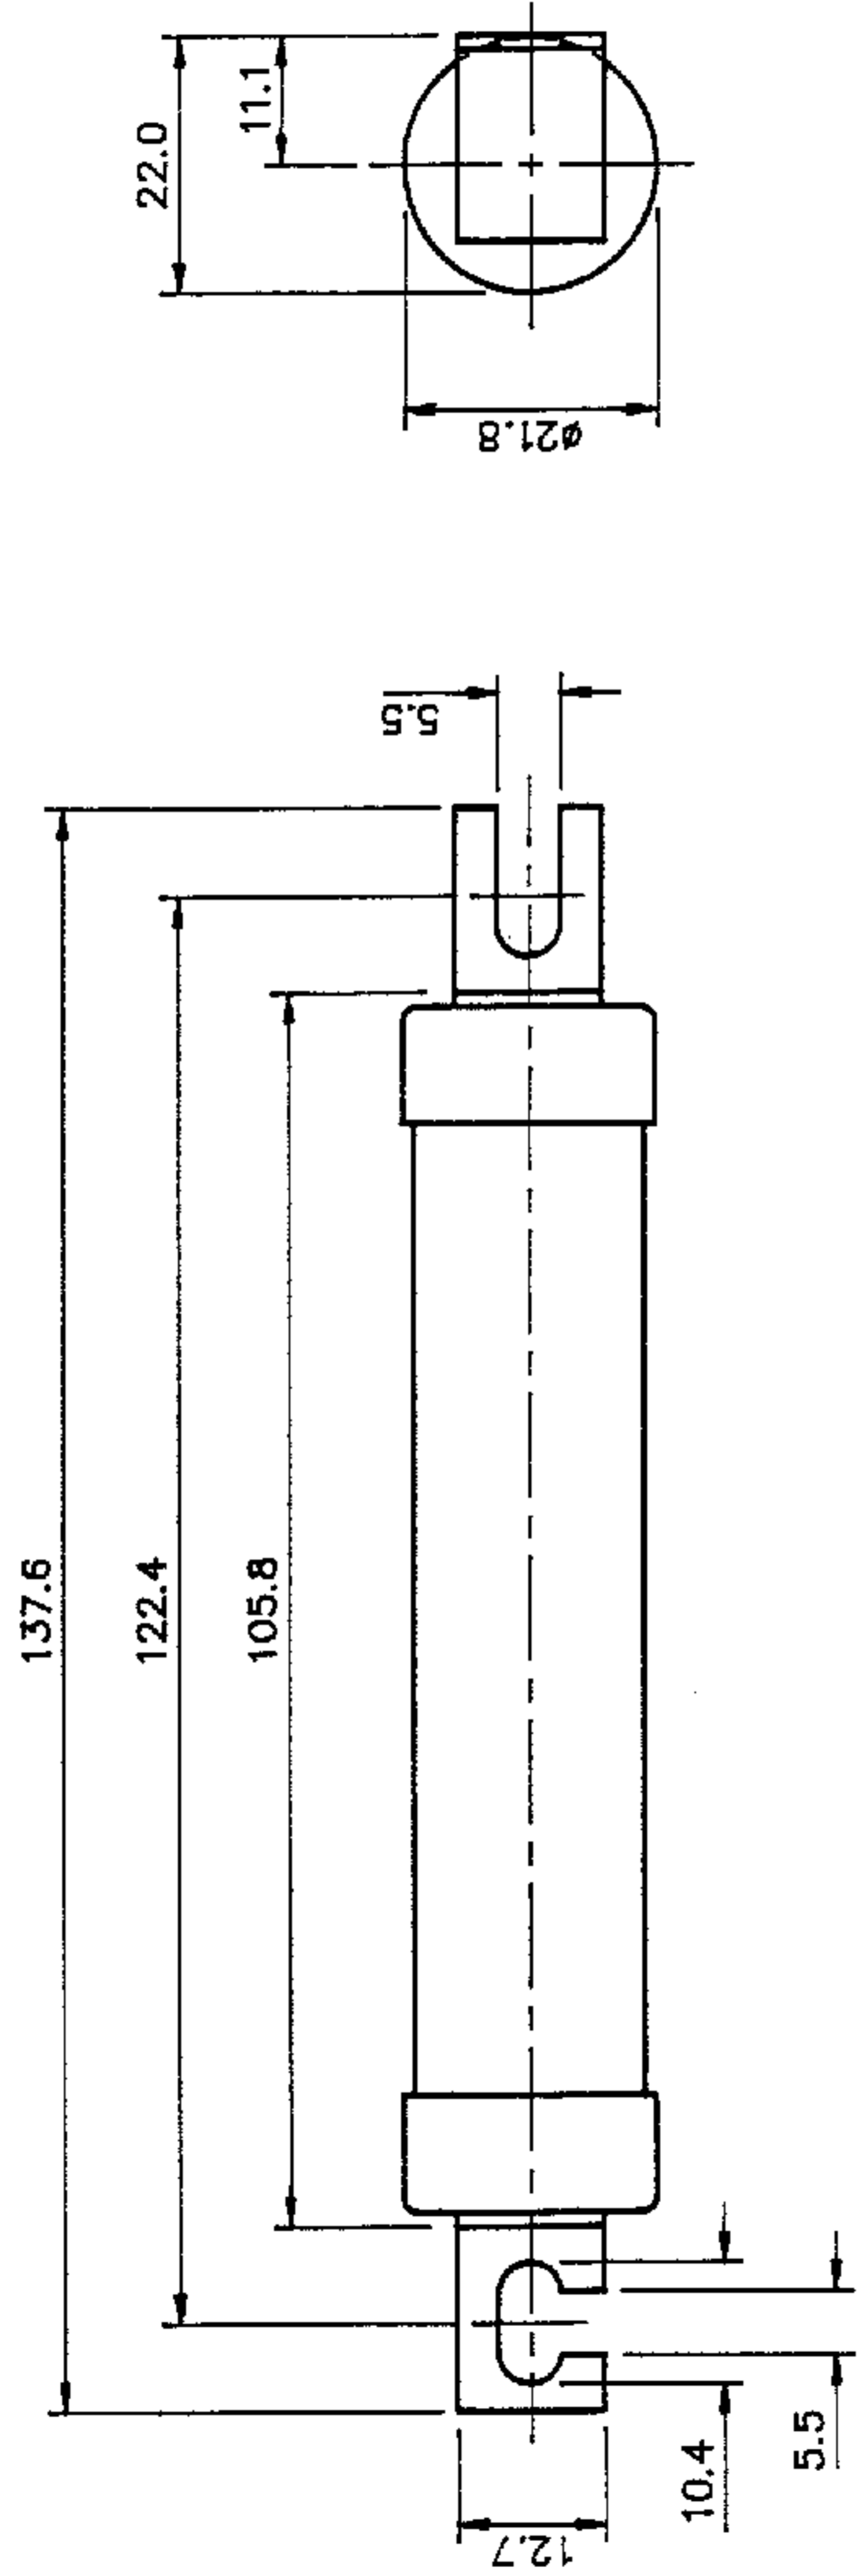

CATEGORY OF DUTY: - 1200Va.c./750Vd.c.


ALL DIMENSIONS IN MILLIMETRES UNLESS OTHERWISE STATED

ANY UNSPECIFIED TOL.
± 0.4mm

DRG. No. E5778911

OUTLINE FOR 1-30HD36 FUSE LINKS

COOPER Bussmann	TECHNICAL DATA	RATING AND TYPE	I^2t (AMPERE ² SECONDS)				NOM. WATTS LOSS
			PRE-ARCING	TOTAL AT 750Vd.c	TOTAL AT 1200Vd.c	TOTAL AT V	
		2HD36	0.95	2	4.6		1.1
		4HD36	8.5	18	42		1.4
		6HD36	27	57	125		1.8
<u>RANGE</u>	TRACTION	10HD36	135	290	660		2.2
<u>REF.</u>	HD36	15HD36	120	230	320		4.3
<u>CURRENT RATING</u>		20HD36	470	900	1,250		5.0
		25HD36	1,200	2,300	3,150		5.1
	2-30 AMPS	30HD36	1,850	3,600	4,950		6.0
<u>SPECIFICATION</u>							
	80KA BREAKING CAPACITY						
<u>DRG. No.</u>	E5781645						
<u>DATE</u>	FEBRUARY 1987						

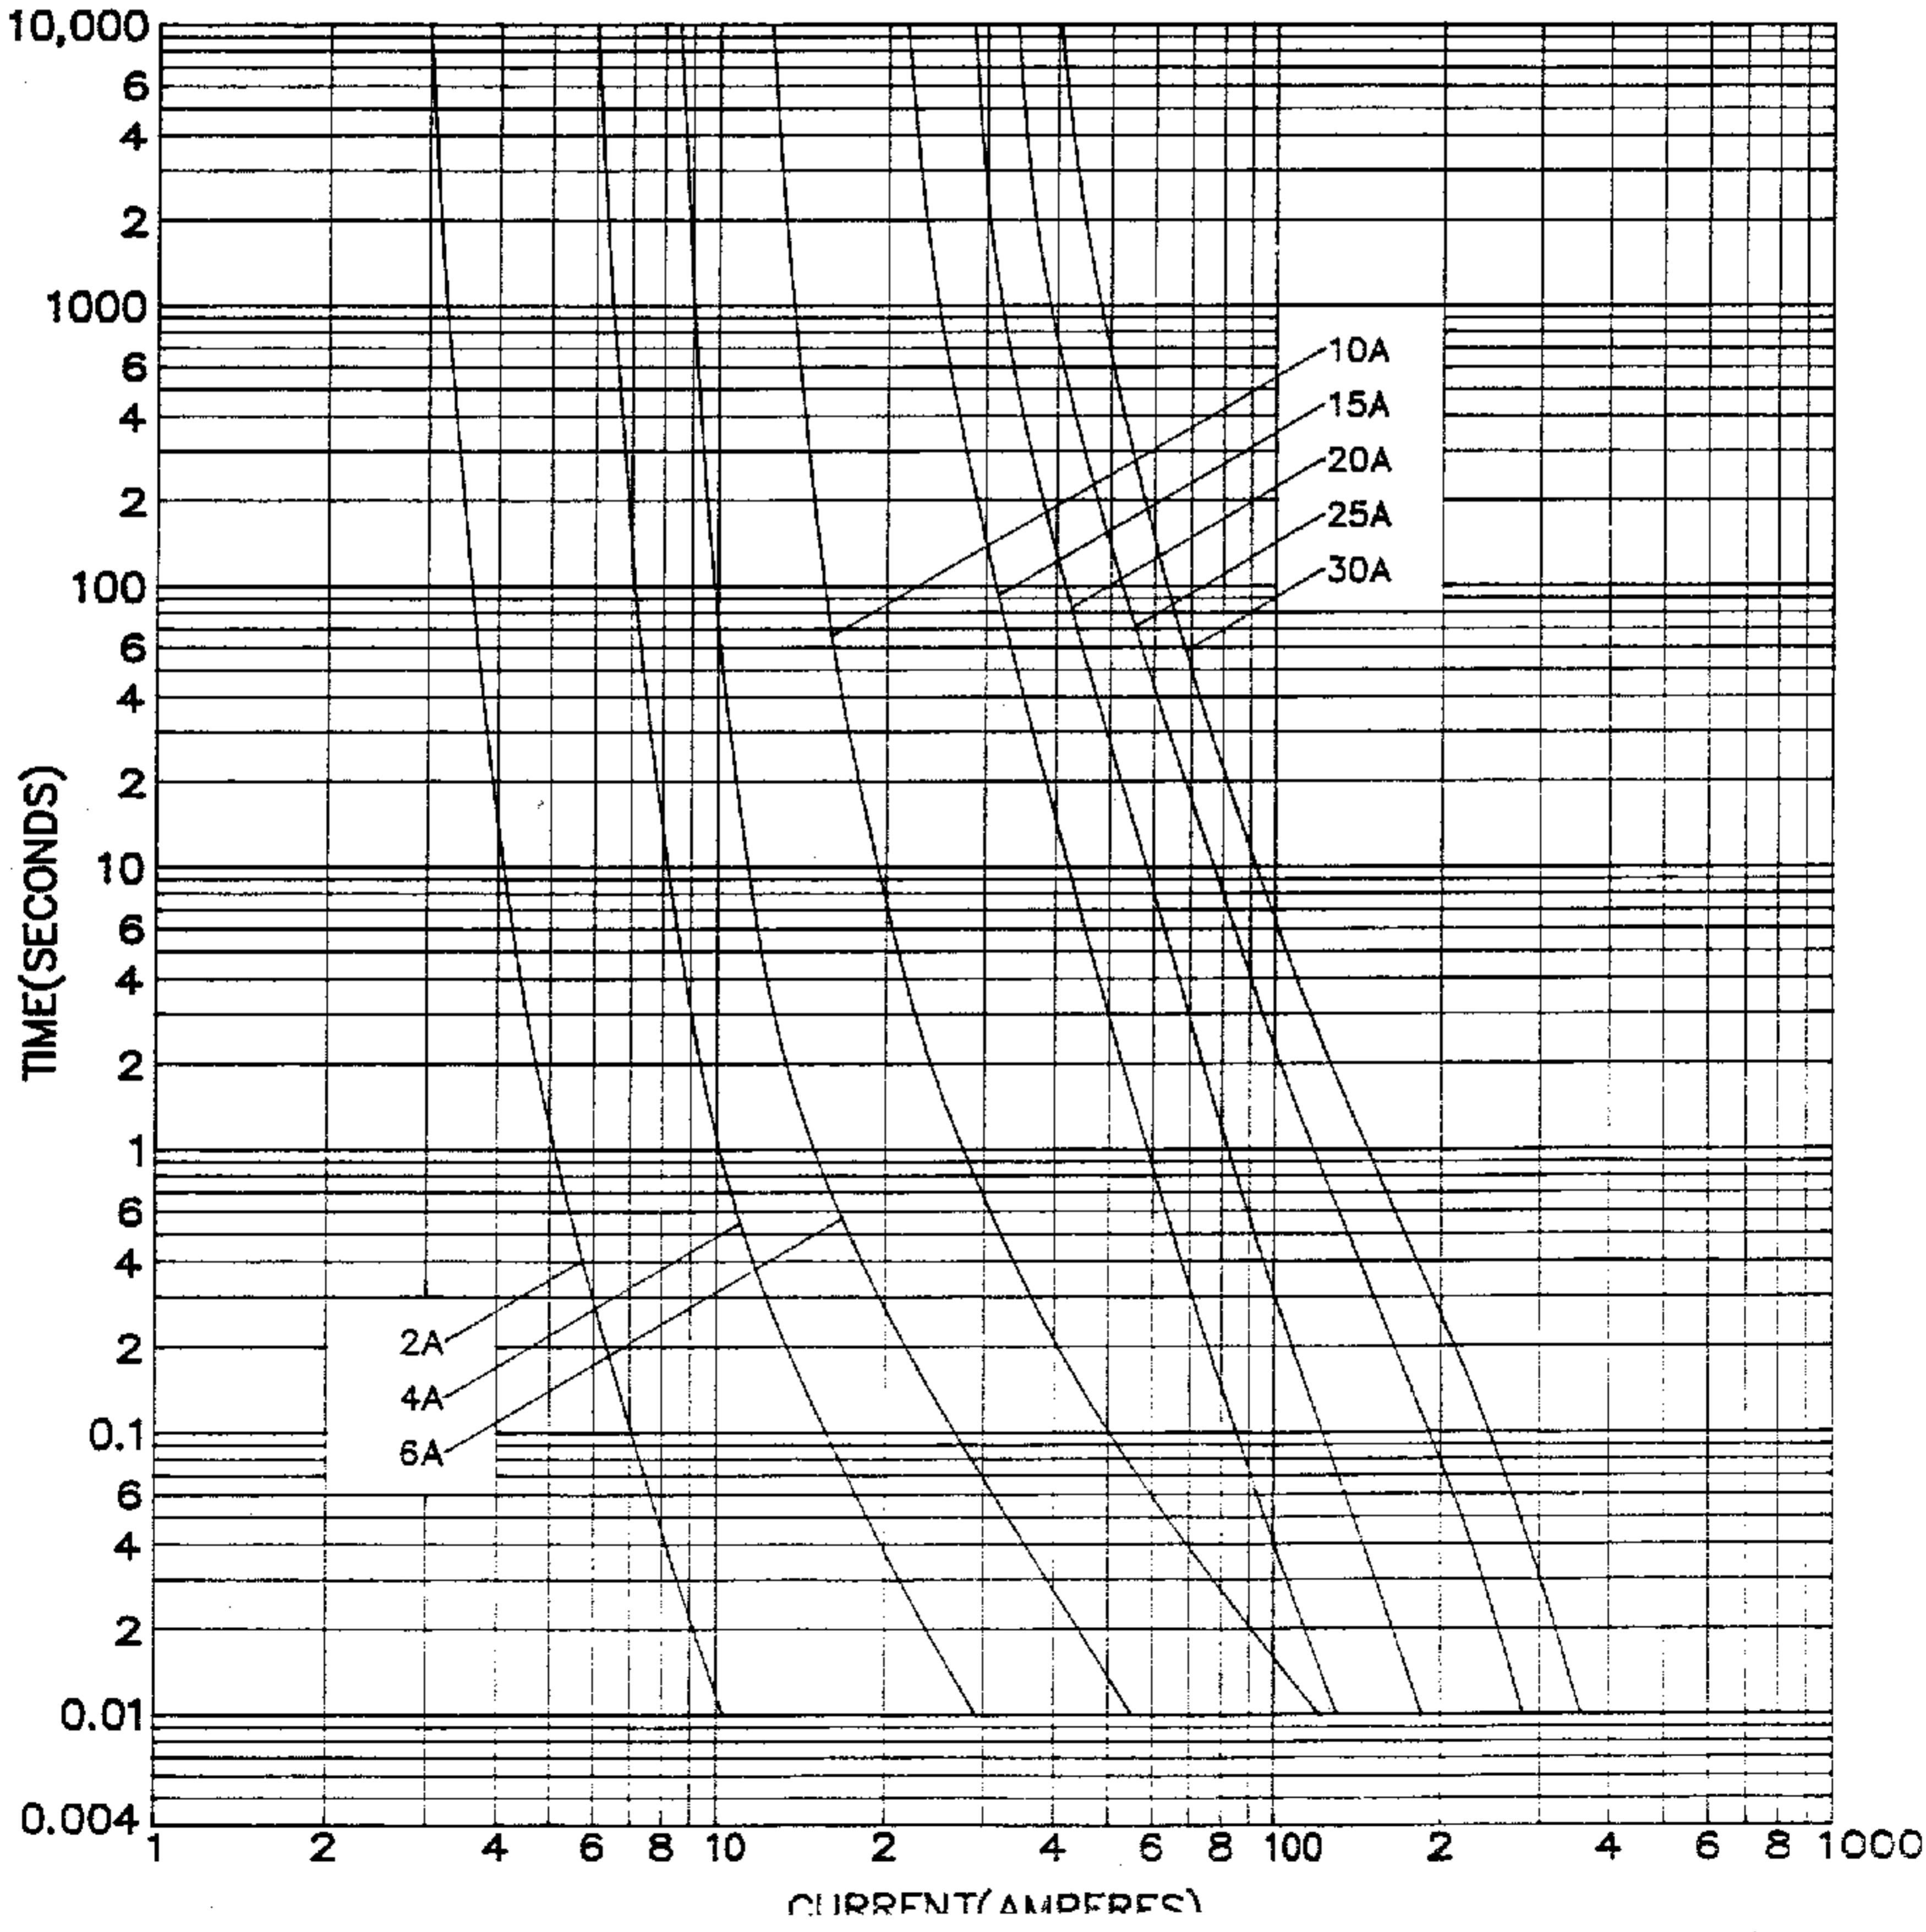



Bussmann

TECHNICAL
DATA

CUT-OFF CURRENT CHARACTERISTICS HD36 1200V_{a.c.} TRACTION FUSE LINK

